



TS3600

COMPACT RECYCLING FOR WINNERS

RUBBLE MASTER[®]
COMPACT RECYCLER

RUBBLE MASTER Compact Recyclers are the compact class in mobile processing and are versatile, powerful and stable in value. They produce high-value primary and secondary raw materials economically and can be transported without requiring special permits. High manufacturing quality, high-value components and the proverbial RUBBLE MASTER Lifetime Support ensure the efficiency and availability of the machines - plus maximum benefits in all operations.



Oversize grain mesh of the feed hopper can be tilted through 90° using remote control



Large-area screen box with 2 equally sized decks for efficiency and rapid changeover



Hydraulically adjustable (up to 25°) angle for critical and fine material



Besides a wheeled loader, a RUBBLE MASTER crusher can also be used for direct feeding.



EFFICIENCY AND QUALITY IN PROCESSING AND RECYCLING

TS3600 – THE COMPACT HIGH-PERFORMANCE SCREEN

The TS3600 is the cost-efficient solution for the production of high-quality, defined grain sizes: whether it's round gravel from the pit or for refining construction waste and demolition brick or concrete. The tracked double-deck screen separates excavated soil, sand and gravel, plus building rubble mixed with high levels of earth and fine grain material. With a feed size of up to 250 mm throughput capacity is up to 200 t/h, depending on the material. The screen can be operated by one person alone, using radio remote control


as an option. All maintenance jobs can be carried out quickly and easily, thanks to perfect accessibility in line with the RUBBLE MASTER Ground Based Service principle. For transport purposes the belts are moved into the transport position and, weighing just 15.5 tonnes and featuring unique, compact dimensions, the TS3600 is ready for transportation to the respective job site without the need for special permits.




4 grain sizes in a single pass with the power pack consisting of RM100 and OS100 - or 3 defined value grains with oversized grain refeeding.




The long, hydraulic fold-in discharge belts can be adjusted steplessly up to 4 metres' discharge height.

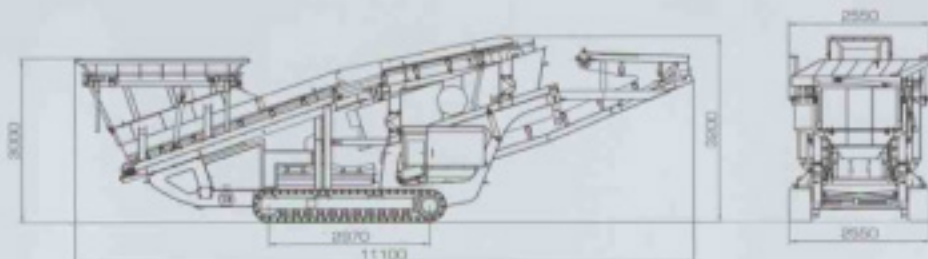

Transport position

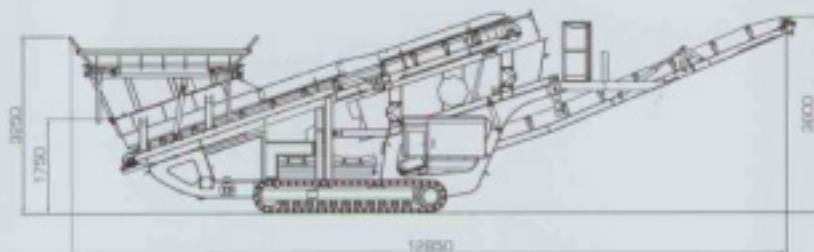

Working position

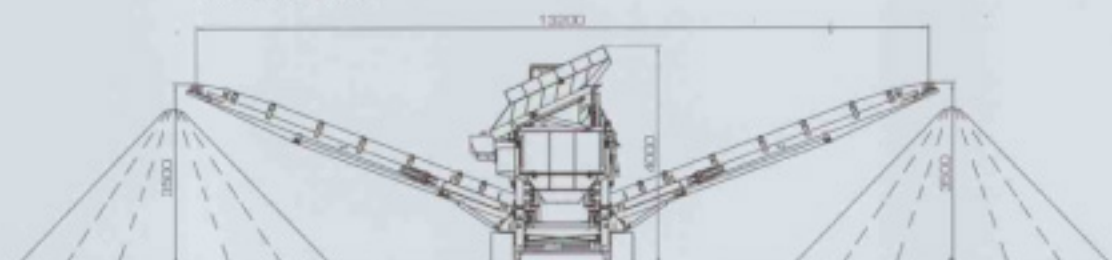

TS3600 Mobile double-deck screen with crawler gear

Throughput up to 200 t/h depending on material length along one edge up to 250 mm
 Feed size rubble, asphalt, concrete, natural rock
 Feed material mobile crawler gear
 Transport system
 Transport weight 15,500 kg

Feed hopper	volumes:	3.8 m ³
	tilting pre-screen:	separation at 100 mm; pivots hydraulically (optional via remote control)
	feed width:	3,200 mm
	feed height:	3,000 mm
Screen box	screen length:	3,000 mm
	screen width:	1,250 mm
	screen angle:	20° to 25°, hydraulically adjustable
	design:	2 deck
Discharge belts	number:	3 for fine/medium/oversize grain pivot hydraulically
	length:	6,500 mm
	discharge height:	up to 4,000 mm
Drive unit	manufacturer:	Deutz
	type:	41.5 kW at 1,500 rpm, 4-cylinder diesel engine

Specifications subject to change in line with technical developments.



www.rubblemaster.com

RUBBLE MASTER
 COMPACT RECYCLER

HMH

**BHP INFRASTRUCTURE
 PLOT 7, SECTOR 4
 FARIDABAD - 121004
 HARYANA, I N D I A
 TEL.: +91-129-4282500
 FAX: +91-129-4063042
 www.bazerworld.com**

HMH Engineering-Consulting-Trading GmbH
 Im Südpark 196 - AT 4030 Linz - Austria
 T +43 . 732 . 73 71 17-42
 F +43 . 732 . 73 71 17-9
 sales@rubblemaster.com